


PRODUCT FEATURES

- *Ideal For Street, High Bay, Low Bay Lighting
- *Up to 205 lm/W LED Module Efficiency
- *5050 Package High Performance LEDs
- *Wide CCT Ranging from 2200K – 6500K
- *Long Life-Time: >100.000 Hours L70B10 @105°C
- *Minimum Colour Tolerance: 3MacAdam (3SDCM)
- *Compatible with Ledil STRADA-IP-24 and HB-IP-24 Families

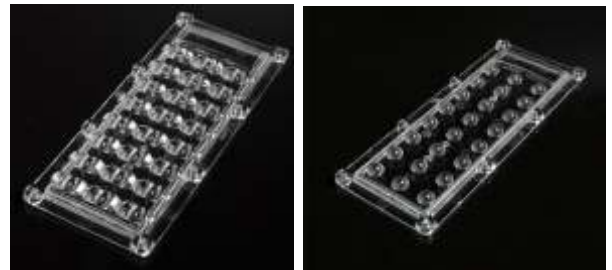

Product Code	CCT K	Current mA	Flux tc 25°C lm	Flux tc 85°C lm	Power tc 85°C W	Efficacy tc 25°C lm/W	Efficacy tc 85°C lm/W	Vmin. Tc 85°C	Vmax. Tc 25°C
PALS00008-3P8S-22-5050	2200	700	7684	6943	46,9	161,4	147,9	44,72	48,32
		1050	10987	9922	72,8	148,9	136,3		
		1400	13899	12545	100,1	137	125,3		
PALS00008-3P8S-27-5050	2700	700	8802	7953	46,9	184,9	169,4		
		1050	12585	11366	72,8	170,5	156,1		
		1400	15920	14370	100,1	156,9	143,6		
PALS00008-3P8S-30-5050	3000	700	9221	8331	46,9	193,7	177,5		
		1050	13185	11907	72,8	178,6	163,5		
		1400	16678	15054	100,1	164,4	150,4		
PALS00008-3P8S-40-5050	4000	700	9780	8836	46,9	205,4	188,3		
		1050	13984	12629	72,8	189,5	173,5		
		1400	17689	15967	100,1	174,4	159,5		
PALS00008-3P8S-50-5050	5000	700	9780	8836	46,9	205,4	188,3		
		1050	13984	12629	72,8	189,5	173,5		
		1400	17689	15967	100,1	174,4	159,5		
PALS00008-3P8S-65-5050	6500	700	9360	8458	46,9	196,6	180,2		
		1050	13384	12087	72,8	181,3	166		
		1400	16931	15282	100,1	166,9	152,7		