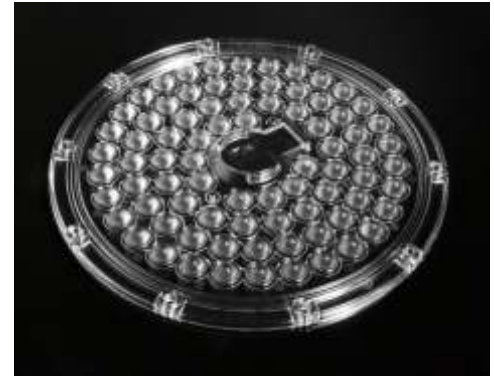

PRODUCT FEATURES

- *Solutions For Premium Class Indoor and Outdoor Lighting
- *Up to 199 lm/W LED Module Efficiency
- *2835 Package High Performance LEDs
- *Wide CCT Ranging From 3000K – 6500K
- *Long Life-Time: >72.000 Hours L70B10 @85°C
- *Minimum Colour Tolerance: 3MacAdam (3SDCM)
- *2835PRO Versions are Proper For Outdoor Applications
- *Compatible with Ledil VICTORIA-MINI Families



Product Code	CCT K	Current mA	Flux tc 25°C lm	Flux tc 65°C lm	Power tc 65°C W	Efficacy tc 25°C lm/W	Efficacy tc 65°C lm/W	Vmin. Tc 65°C	Vmax. Tc 25°C
PALS00020-10P16S-30-2835	3000	700	5880	5483	31,5	183,8	173,9	45,12	47,36
		1050	8647	8061	48,3	176,6	167		
		1400	11293	10525	65,5	170,1	160,7		
PALS00020-10P16S-40-2835	4000	700	6136	5722	31,5	191,8	181,4		
		1050	9023	8412	48,3	184,3	174,2		
		1400	11784	10983	65,5	177,5	167,7		
PALS00020-10P16S-50-2835	5000	700	6221	5801	31,5	194,5	183,9		
		1050	9148	8528	48,3	186,9	176,6		
		1400	11948	11136	65,5	180	170		
PALS00020-10P16S-65-2835	6500	700	6136	5722	31,5	191,8	181,4		
		1050	9023	8412	48,3	184,3	174,2		
		1400	11784	10983	65,5	177,5	167,7		
PALS00020-10P16S-30-2835PRO	3000	700	6157	5869	31,6	192,5	186	45.12	47,68
		1050	9087	8662	48,4	185,2	178,9		
		1400	11925	11368	65,9	178,8	172,6		
PALS00020-10P16S-40-2835PRO	4000	700	6413	6114	31,6	200,6	193,7		
		1050	9465	9023	48,4	192,9	186,3		
		1400	12422	11841	179,7	186,2	179,7		
PALS00020-10P16S-50-2835PRO	5000	700	6413	6114	31,6	200,6	193,7		
		1050	9465	9023	48,4	192,9	186,3		
		1400	12422	11841	65,9	186,2	179,7		
PALS00020-10P16S-65-2835PRO	6500	700	6413	6114	31,6	200,6	193,7		
		1050	9465	9023	48,4	192,9	186,3		
		1400	12422	1841	65,9	186,2	179,7		